


Film Processor F-30

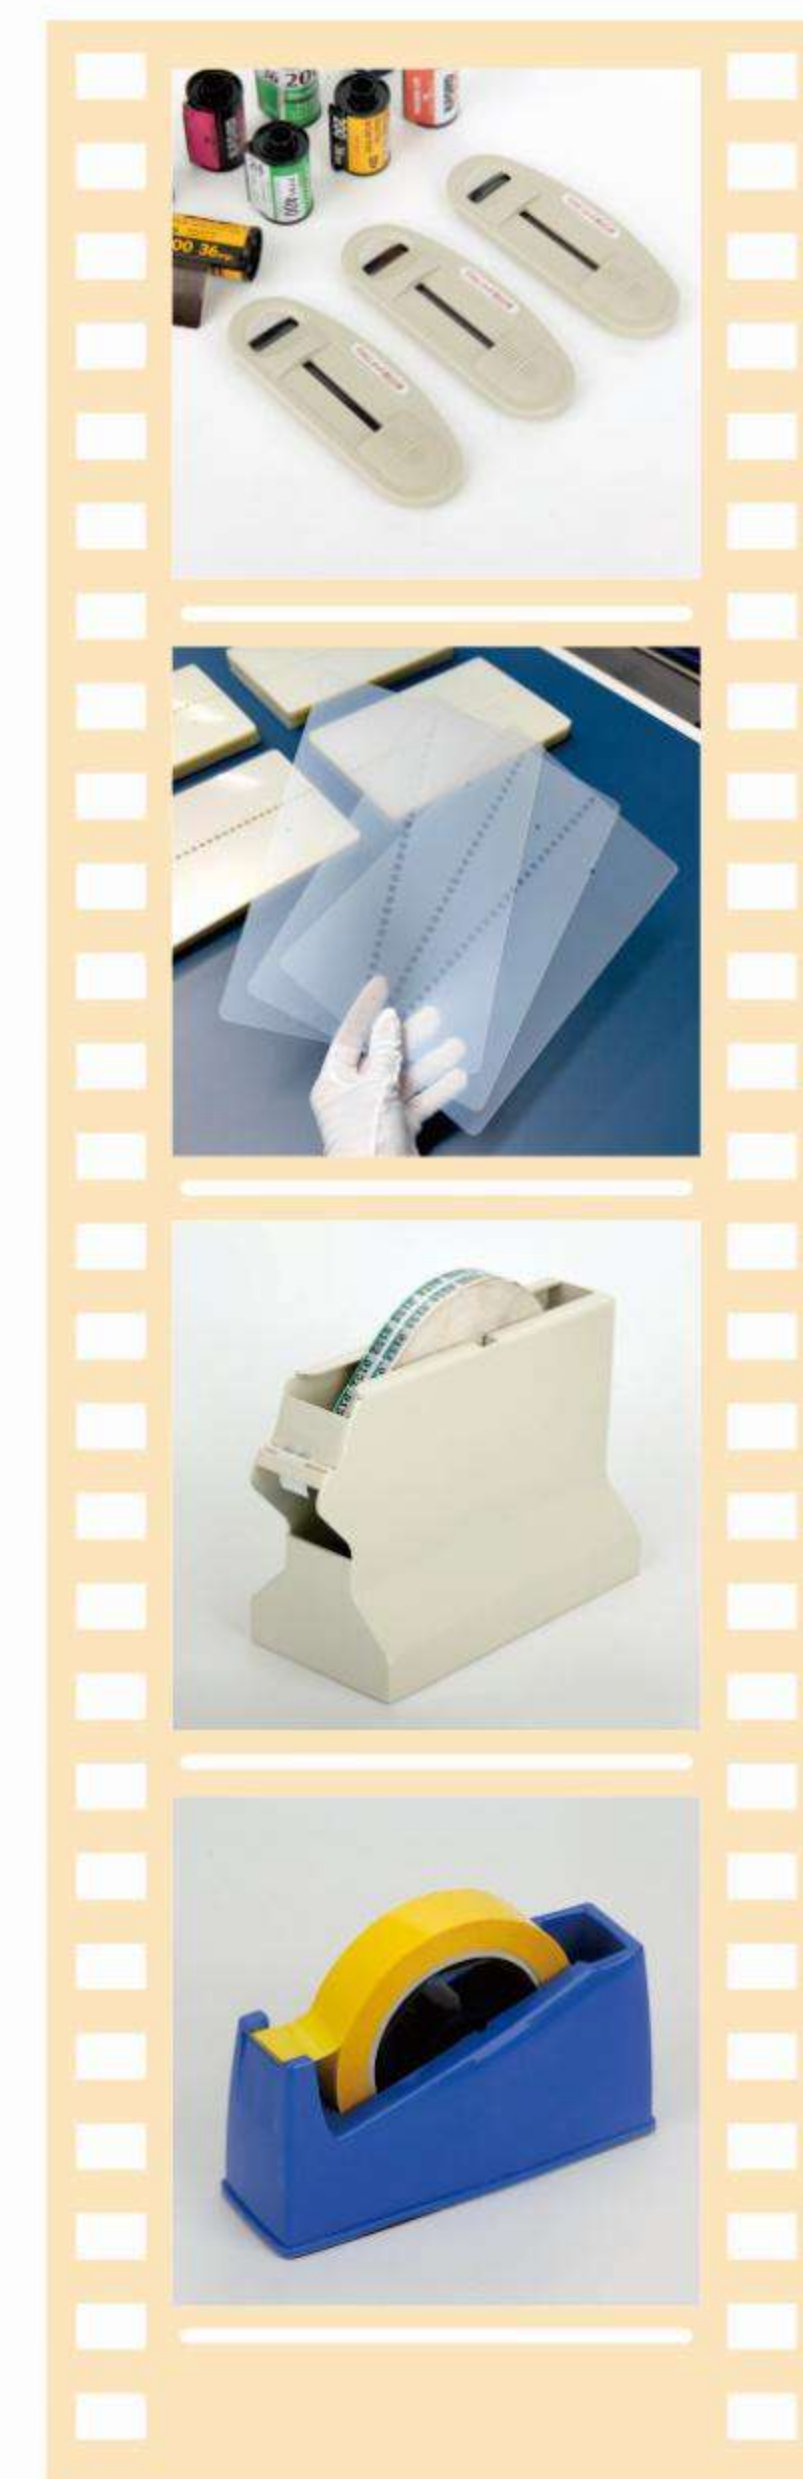

Description

The F-30 Film Processor delivers exceptional reliability and precision for professional photo labs requiring high-quality film development. It offers a large graphic display, dual lane processing and automatic film size detection, so operation is a snap even for new operators.

*And the ability to process 110, 120, 135, 120 through IX240 color negative film, lets you draw from the widest customer base possible.

*With consistent chemical stability and temperature control, ensuring optimal color reproduction and image clarity with every roll.

*Featuring automated replenishment systems and simplified maintenance protocols, the F-30 maximizes operational efficiency while minimizing chemical waste, making it an ideal solution for photography businesses seeking to maintain traditional film processing capabilities with modern reliability standards.

Processable Film Sizes	110, 126, 135, 120, 220, IX240/APS	Waste Solution Tank	Built-in, with high level sensors.
Method	Leader Card Transport.	Dryer	Automatic on/off. Hot air impingement.
Processing Speed	307 mm/min.	Dimensions (mm)	540 (w) x 1066(D) x 1270 (H)
Circulation Pumps	Corrosion resistant magnetic pumps with rotation sensors.	Weight (kg)	165kg (processor) +83kg (solution) =248kg
Temperature Control	Via micro-computer, digital with upper and lower warnings. Each tank can be controlled separately.	Electrical Capacity	Single phase 2 wire, AC 220V, 3.0 kVA(14A) Single phase 2 wire, AC 230V, 3.2 kVA(14A) Single phase 2 wire, AC 240V, 3.3kVA(14A)
Replenishment	Automatic. Inner mixing device built-in.		

PROCESSING CAPACITY	135F (12Exp)	135F (24Exp)	135F (36Exp)	IX240 (25Exp)	110 (12Exp)	110 (24Exp)	120	220	126 (12Exp)	126 (24Exp)
	38	26	22	26	50	34	32	18	48	32
Film Size ROLLS PER HOUR	38	26	22	26	50	34	32	18	48	32

C-41RABNP	CD	BL	FIX	STB	Dry
Processing tank capacities(liters)	11L	10L	12L (2 tanks)	12L (3 tanks)	
Operating temperature(Fahrenheit)	37.8 °C ±0.25	38°C	38°C	38°C	60°C
Time per step(seconds)	195	45	90	105	122
Replenisher tank capacities(liters)	12	12	12	12	
Water replenisher tank(liters)	10				
Water tank capacities(liters)	3.3		8.8		

C-41BNP	CD	BL	FIX	STB	Dry
Processing tank capacities(liters)	11L	10L	12L (2 tanks)	12L (3 tanks)	
Operating temperature(Fahrenheit)	37.8 °C ±0.25	38°C	38°C	38°C	60°C
Time per step(seconds)	195	195	260	140	122
Water replenisher tank(liters)	10				
Water tank capacities(liters)	2.4	0.9	4.3	4.5	